

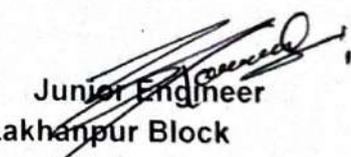
Construction of Statue Platform & Beautyfication of Rampaluga Rural Park

Bill of Quantity					
Sl. No.	Item of Work	Quantity to be executed	Unit	Rate	Amount
1	2	3	4	5	6
1	Excavation of foundation in hard soil including leveling & dressing the bed etc	255.83	1Cu.m	199.58	51058.00
2	Sand filling the foundation with well watered and rammed with all labours T & P and cost , Conveyance etc	246.38	1Cu.m	465.17	114610.00
3	PCC (1:3:6) using 40 mm size HG metal of approved quality and from approved quarry including all labours etc	194.36	1Cu.m	4791.46	931267.00
4	RCC work of M25 grade with 20 mm and down grade black including laying and hosting etc				
i	Base, Base wall, column footi, stair case, guard wall	136.28	1Cu.m	6382.39	869807.00
ii	Column, Roof beam	15.41	1Cft	15292.44	235592.00
iii	Roof slab	8.84	1 cum	12084.62	106873.00
5	Cutting bending binding of TS rod with all labours T & P and cost of rod etc	160.53	1qntl	8476.96	1360822.00
6	16 mm thick cement plaster in cm (1:6) over brick work with all finishing curing etc	268.11	1sqm	212.19	56890.00
7	Painting two coats to wall surface with distemper of approved quality surface shade including all labours T & P etc	268.11	1sqm	102.66	27523.00
8	Collecting, conveying and supplying laterite moorum on road site regular box heaps site size to be measured as one cum.				
i	Base	18.57	1cum	280.29	5206.00
9	Labour for spreading of moorum on road with proper chambering etc				
i	Base	18.57	1cum	152.18	2826.00
10	Granite stones (15cm to 30 cm) etc				
	Base	50.94	1cum	1367.88	69680.00
11	Excavation loading uploading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc	235.04	1cum	75.70	17792.53

12	Fine dressing and turfing the slopes of the dam, dyke, embankment with compact dub grass with all lifts and lead of 1km as per the direction of Engg-in-charge	128.7	1cum	21.87	2814.98
13	Fixing granite tiles in floors treads steps and landing on 25 mm thick bed of cement mortar (1:1) jointed				
14	Base, stair, trac, rise	89.47	1 sqm	2311.88	206843.48
15	P/F 60 mm thick factory made CC interlocking paver Block of M-30 grade made by block making machine over and i/c 50 mm thick bed of C. sand filling th apathway	743.2	1sqm	827	614626.00
16	Supply fitting and fixing of stainless steel of 304 grade in hand railing using 50 mm dia of 2mm thick circular pipe with balustrade of size 32mm x 32mm x 2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc				
i	Top Base, Ground Base, Stair Case	173	1 mtr	3637.53	629293.13
				Total	5303524.12
			or say	Total	5303500.00

Rupees fifty three lakh three thousand five hundred only


Assistant Executive Engineer
Lakhanpur Block


Junior Engineer
Lakhanpur Block

Approved for 16 (sixteen) items only

My/our quoted rate is % (both in figures and words) excess over / less than / equal to the above estimated cost.


NOTES :-

1. The contractor should not write anything excepting quoting of percentage and in any case anything else
2. Percentage quoted by the tenderer shall be accurately filled in words and in figures..
3. Strike out which is not applicable. If the tenderer quotes the percentage without mentioning excess or less, it
4. Percentage should be quoted up to (one) digit after the decimal point. If the tenderer writes more than 1 digit
5. Rate of all items are inclusive of cost, carriage, royalty, cess and other taxes of materials.

Tenderer

No. of corrections.....
No. of Over writings.....
No. of Interpolations.....

Contractor


Block Development Officer
Lakhanpur