

ZILLA PARISHAD  
JHARSUGUDA



PR & DW DEPARTMENT, ODISHA  
**BID DOCUMENT**

Name of the Work	:	Repairing and Renovation of Bapuji Govt High School Sripura
Name of the Block	:	Jharsuguda
Name of the District	:	Jharsuguda
Estimated Cost	:	Rs 55,20,000.00
Tender Value	:	Rs 38,24,544.00


**Tender Schdule**


<b>Tender Inviting Authority : BLOCK DEVELOPMENT OFFICER, JHARSUGUDA</b>					
<b>Name of work :- Repairing and Renovation of Bapuji Govt High School Sripura</b>					
<b>Tender Call Notice No : of 2024-25</b>					
<b>Name of of the Bidder, Mobile No. and Address :-</b>					
Sl. No.	Item Description	Quantity	Unit	Estimate rate	Total Amount without Taxes
1	2	3	4	5	6
1	Dismantaling and removing R.C.C Column beam slab staircase landing lintels including stacking the useful material for reuse & removing the debris with in 50m lead for 1 cum	6.08	One sqm	1655.15	10063.00
2	Dismantling brick or stone masonry in lime or cement mortar under 3M height including stacking the useful materials for reuse and removing the debris within 50M lead per 1 Cum	66.32	One cum	1569.85	104112.00
3	Dismantling G.C.I. or A.C. sheet roofing after carefully removing the bolts and nuts including stacking the useful materials for reuse and removing the debris within 50m lead. Per 1 sqm	433.40	One sqm	101.45	43948.00
4	Labour for fixing of GCI.Sheet in roof including fixing of ridges and wind ties etc. complete but excluding cost of fitting	196.80	One sqm	561.25	110454.00
5	Removing old lime or cement plaster from walls including racking out joints 12mm deep and stacking the useful materials for reuse and removing the debris within 50m lead.	289.98	One sqm	56.20	16297.00
6	Excavation of foundation including dressing and levelling the bed and depositing the soil in hard soil or gravelly soil within 50 m. initial lead and 1.5 m. initial lift including rough dressing and breaking clods to maximum 5 cm. to 7 cm. and laying in l	153.06	One cum	269.70	41280.00
7	Supplying filling in foundation and plinth with sand including watering ramming, cost, conveyance, royalties and all taxes of materials and cost of all labour with T&P required for the work etc. complete as directed by the Engineer-in-charge.	154.01	One Cum	981.90	151222.00
8	Cement concrete (1:3:6) in foundation and plinth using 4 cm size hard granite metal of approved quality form approved quarry including hoisting and lowering concrete and laying in layers each layer not exceeding 15 cm in thick, ramming to proper level including watering and curing with cost, conveyance, taxes and royalties of all materials, cost of all labour and T&P required for the work etc.complete as per direction of the Engineer-in-charge.	22.52	One Cum	6316.40	142245.00
9	Cement Concrete(1:2:4)with 12mm size C.B.H.G.Chips including cost. Carriage & royalty etc. complete.	10.46	One Cum	7885.90	82502.00
10	2.5 cm. thick grading concrete (1:2:2) on roof slab with 6 mm. size c.b.h.g. chips.	301.39	One sqm	430.45	129735.00
11	Brick masonry work with Fly ash bricks in cement mortar (1:6) F & P including cost, carriage & royalty of materials etc. complete as per the direction of Engineer-in-charge.	14.65	One Cum	5807.25	85076.00
12	Brick masonry in cement mortar (1:6) using Fly ash.Bricks of size 9" x 5" x 3" having crushing strength not less than 75 Kg/cm <sup>2</sup> in super structure after immersing the bricks for six hours in water before use in all flors with all necessary projection, cutting mlding, corbelling, champering, watering and curing including cost conveyance, royalties and taxes of all materials and cost of all labour T&P required for the work etc.complete as per the direction of Engineer in Charge.	40.55	One Cum	5840.60	236813.00

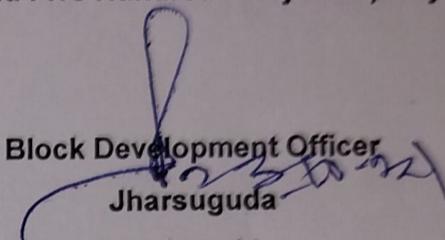
13	Fixing tiles in floors treads or steps and landing on 25mm thick bed of cement mortar 1:1 (1 cement : 1 sand) jointed with neat cement slury mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost of precast tiles. Per 1sqm	3 of 4 503.73	One sqm	1066.25	537106.00
14	Fixing tiles in dados skirting and riser of steps on 12mm thick cement plaster 1:3 (1 cement : 3 sand) jointed with neat cement slury mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost of precast tiles. Per 1sqm	99.91	One sqm	1212.70	121161.00
15	R.C.C.work of M-25 grade having a minimum compressive strength (in work test) of 250 kg/cm <sup>2</sup> in 15 cm cubes at 28 days using 12mm nominal size black hard crusher broken granite chips including hoisting,lowering laying and compacting concrete by using vibrator with watering and curing for 28 days centering and shuttering and finishing the exposed surface smooth providing grooves and beads wherever necessary including cost conveyance,royalties and all taxes of all materials and cost of all labour with T&P required for the work etc.complete but excluding cost of M.S.Rods or Tor Steel and binding wires and labour charge for bending binding and tying the grills etc.complete in all respect as per direction of Engineer-in-charge.				
A.	Plinth band	0.84	One Cum	7681.35	6481.00
B.	Column	2.06	One Cum	18304.75	37681.00
C.	Lintel	0.84	One Cum	14416.85	12164.00
D.	Roof Slab	8.70	One Cum	13978.95	121551.00
16	Providing HYSD bar reinforcement for R.C.C. work including straightening, cutting, bending, binding, welding if required, tying the grills and placing in proper position as per approved design and drawing including cost, conveyance, taxes of MS/TS rods and binding wire of 18 to 20 gauge binding wire, cost of all labour, T&P materials required for the work etc.complete in all respect as per specification and direction of Engineer - in - Charge.	12.44	One Qtl	9113.30	113382.00
17	12mm thick cement plaster (1:6) over brick work including cement punningfor dado and skirting including watering and curing with cost,conveyance taxes and royalties of all materials and cost of all labour with T&P required for the work complete as per the direction of Engineer in Charge.	310.96	One Sqm	190.15	59130.00
18	16mm thick cement plaster (1:4) over brick work including cement punningfor dado and skirting including watering and curing with cost,conveyance taxes and royalties of all materials and cost of all labour with T&P required for the work complete as per the direction of Engineer in Charge.	554.05	One Sqm	273.30	151421.00
19	Finishing wall surface with Acrylic wall putty (water based) of approved make and finish smooth and even surface to receive painting including cost of all materials labour T&P etc complete.	901.58	One Sqm	98.90	89166.00
20	Cement washing one coat including watering and curing with cost,conveyance taxes and royalties of all materials and cost of all labour with T&P required for the work complete as per the direction of Engineer in Charge.	1212.09	One Sqm	17.25	20909.00
21	Distempering 2 coats to wall with distemper of approved shade on new work to give an even shade including cost of Distemper.	775.40	One Sqm	134.00	103903.00
22	Priming one coats with any approved primer on new plaster surfafa including cost of paints, brush etc. per sqm.	2119.81	One Sqm	76.35	161848.00
23	Finishing walls with water proofing weather coat paints of approved shade in new work 2 coats to give an shade including cost of paints.	1280.66	One Sqm	143.35	183583.00
24	Supplying fitting and fixing of chequered tile on floors treads and landing on 25mm thick bed of cement mortar (1:1) jointed with neat cement slurry etc complete.(Data for 10sqm)	232.26	One Sqm	1006.15	233686.00

25	Door & window	4 of 4 3.08	qtl	16228.28	50000.00
26	Lightening Arrester 3 nos	3.00	nos	30000.00	90000.00
27	PMSHRI Branding	1.00	nos	50000.00	50000.00
28	Sports equipment				300000.00
29	Truss & angle for GCI sheet	6.16	Qtl	13801.30	84972.00
30	Display	1	Nos	5000	5000.00
31	Total				3786677.00
32	Contigency 1%				37867.00
	Thirty two nos. only				3824544.00

Rupees Thirty Eight Lakhs Twenty four Thousand Five Hundred Forty Four)Only

  
Junior Engineer  
Jharsuguda Block

  
23/10/24  
Assistant Executive Engineer  
Jharsuguda Block

  
Block Development Officer  
Jharsuguda

My/ our quoted rate is \_\_\_\_\_ % (both figure & words) excess over/ less than /equal to above estimated cost.

**Signature of the tenderer**

Notes:- (1) The contractor should not write any thing except quoting of percentage and in case of any thing else regarding tender rate mentioned, the tender is liable for rejection.

(2) Strike out which are not applicable.

(3) Percentage quoted by the contractor shall be accurately filled in figures and words so there is no discrepancy.

(4) If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.

(5) The percentage quoted in the tender without mentioning excess or less will be treated as excess.

(6) The contractor will write percentage excess or less upto one decimal point only. If he writes the percentage excess or less upto two or more decimal point shall only be considered.

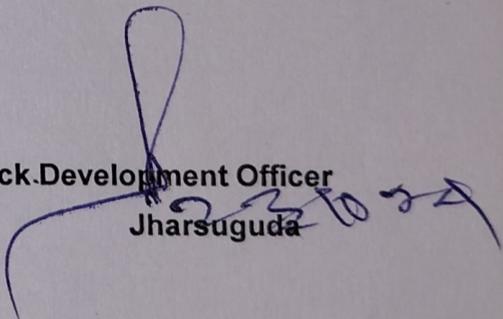
**Tenderer**

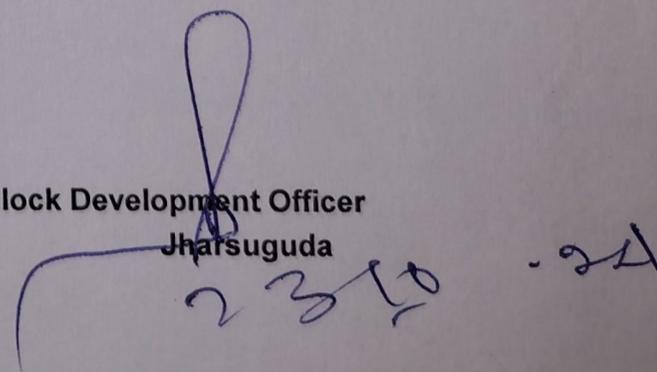
Total-32(Thirtytwo nos) items only.

No. of Correction  
No. of Overwriting  
No. of Interpolation

Approved for - 32(Thirty two nos) Items only.

**Signature of Contractor**

  
Block Development Officer  
Jharsuguda

  
Block Development Officer  
Jharsuguda