


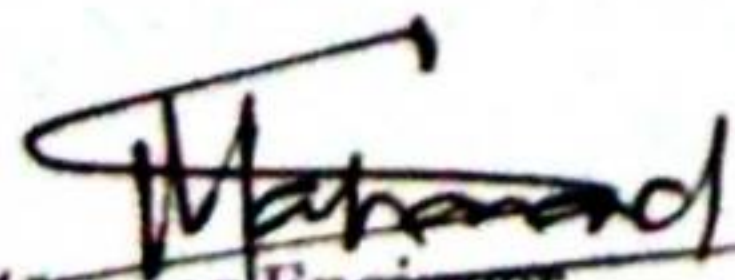

# BILL OF QUANTITY

## RENOVATION OF NEW TANK AT TILIGI

| NO | ITEM OF WORK  | QUANTITY | UNIT | RATE    | AMOUNT                  |
|----|---|----------|------|---------|-------------------------|
| 1  | Excavation, loading and carriage by mechanical means all kinds of soil, including stoney earth, gravel and moorum etc interspread with boulders upto 1/2 cum size with all lifts and delifts including trimming of slopes and | 11346.64 | Cum  | 115.00  | Rs. 13,04,863.00        |
| 2  | Earth work excavation in hard soil within Initial lead and initial lift including rough dressing and levelling the foudation bed and depositing the excavted earth away from work site etc.compelte                           | 199.30   | Cum  | 274.15  | Rs. 54,637.00           |
| 3  | Filling foundation and plinth with well watered and rammed sand including all cost, convayance and royalty of all materials etc.  | 84.04    | Cum  | 994.73  | Rs. 83,597.00           |
| 4  | CC(1:3:6) using 40 mm size CBG mental in foudation including all cost,conveyance, curing and royalty etc complete.  | 134.33   | Cum  | 6726.10 | Rs. 9,03,503.00         |
| 5  | Cement concrete(1:2:4) using 12mm size hard granite chips of approved quality including cost, conveyance, taxes & royalty of all materials and  | 11.14    | Cum  | 8036.07 | Rs. 89,558.00           |
| 6  | Rigid and smooth Centering and shuttering for R.C.C.Works and dismantling then after casting including cost of all materials complete.  | 177.75   | Cum  | 246.15  | Rs. 43,753.00           |
| 7  | 2.5cm D.P.C. with C.C(1:2:4) by using 12mm size c.b.h.g. Chips including cost of all materials and labour T & P etc.comp.   | 10.62    | Cum  | 471.23  | Rs. 5,005.00            |
| 8  | 12mm.thick Cement Plaster in C.M.(1:6) including cost, carriage & royalty etc. complete.  | 394.79   | Cum  | 196.06  | Rs. 77,401.00           |
| 9  | Paver Block   | 472.00   | sqm  | 981.00  | Rs. 4,63,032.00         |
| 10 | Display board   |          |      |         | Rs. 5,000.00            |
| 11 | Chair   |          |      |         | Rs. 30,600.00           |
|    | <b>TOTAL</b>  |          |      |         | <b>Rs. 30,60,949.00</b> |

  
Junior Engineer  
Lakhanpur

  
Asst. Exe. Engineer  
Lakhanpur

  
Block Development Officer  
Lakhanpur

My/our quoted rate is ..... % ( both in figures and words) excess over / less than / equal to the above estimated cost.

Signature of Tenderer |

**NOTES :-**

1. The contractor should not write anything excepting quoting of percentage and in any case anything else regarding tender rate is mentioned, the tender is liable for rejection.
2. Percentage quoted by the tenderer shall be accurately filled in words and in figures..
3. Strike out which is not applicable. If the tenderer quotes the percentage without mentioning excess or less, it will be considered as excess.
4. Percentage should be quoted up to (one) digit after the decimal point. If the tenderer writes more than 1 digit after decimal, than the first digit will only be considered without rounding off.
5. Rate of all items are inclusive of cost, carriage, royalty, cess and other taxes of materials.

**Tenderer**

No. of corrections.....

No. of Over writings.....

No. of Interpolations.....